


Toepassingsgebieden

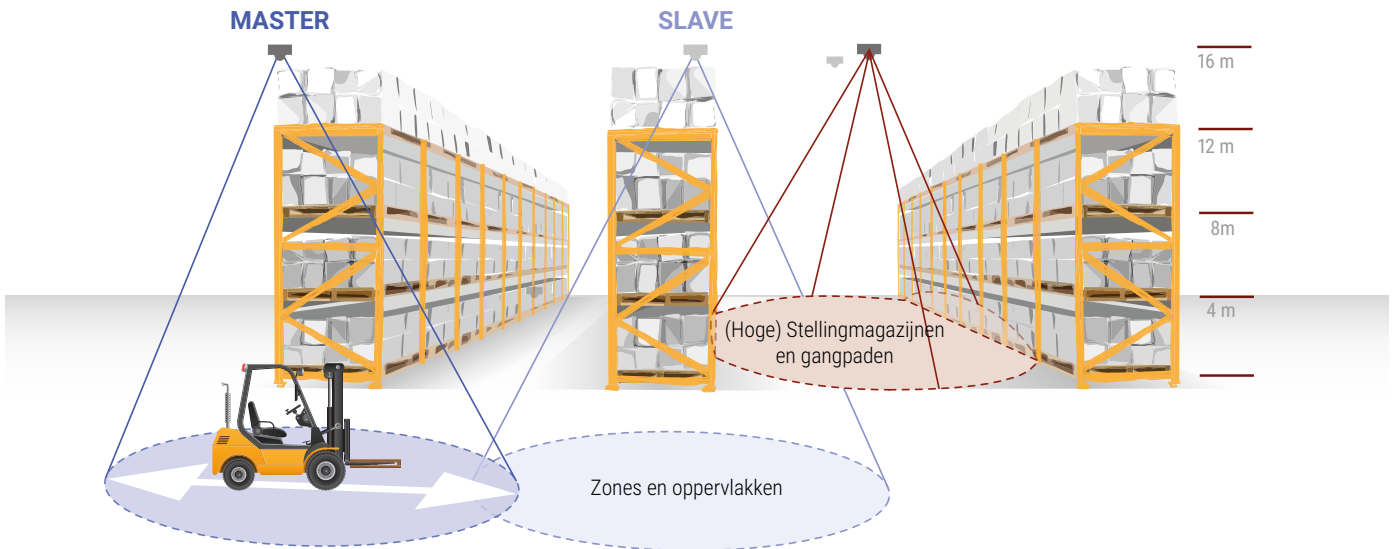

SRG(S) V /0750 netlife easy21 VW

		Beschermingsgraad IP20/IP54					
		Detectiebereik					
Stuursignaal	Montagehoogte	Master	Slave	Master	Slave	Schakelapparatuur max.	
	DALI	5-16 m	easy07	easy20		40	
	DALI	2-10 m			easy15	easy19	40
	DALI	4-14 m	easy21	easy22	easy23	easy24	30
	Schakelen	4-14 m	easy49		easy48		400W
	DALI	5-16 m	flex39	flex37		32	
	DALI2	5-16 m	pro08/09				
		2-10 m			pro13		
		2-5 m			pro14		
	KNX	5-16 m	pro47				