


# turas

Luminaire family

multiple  
plural  
simple



**REGIOLUX**

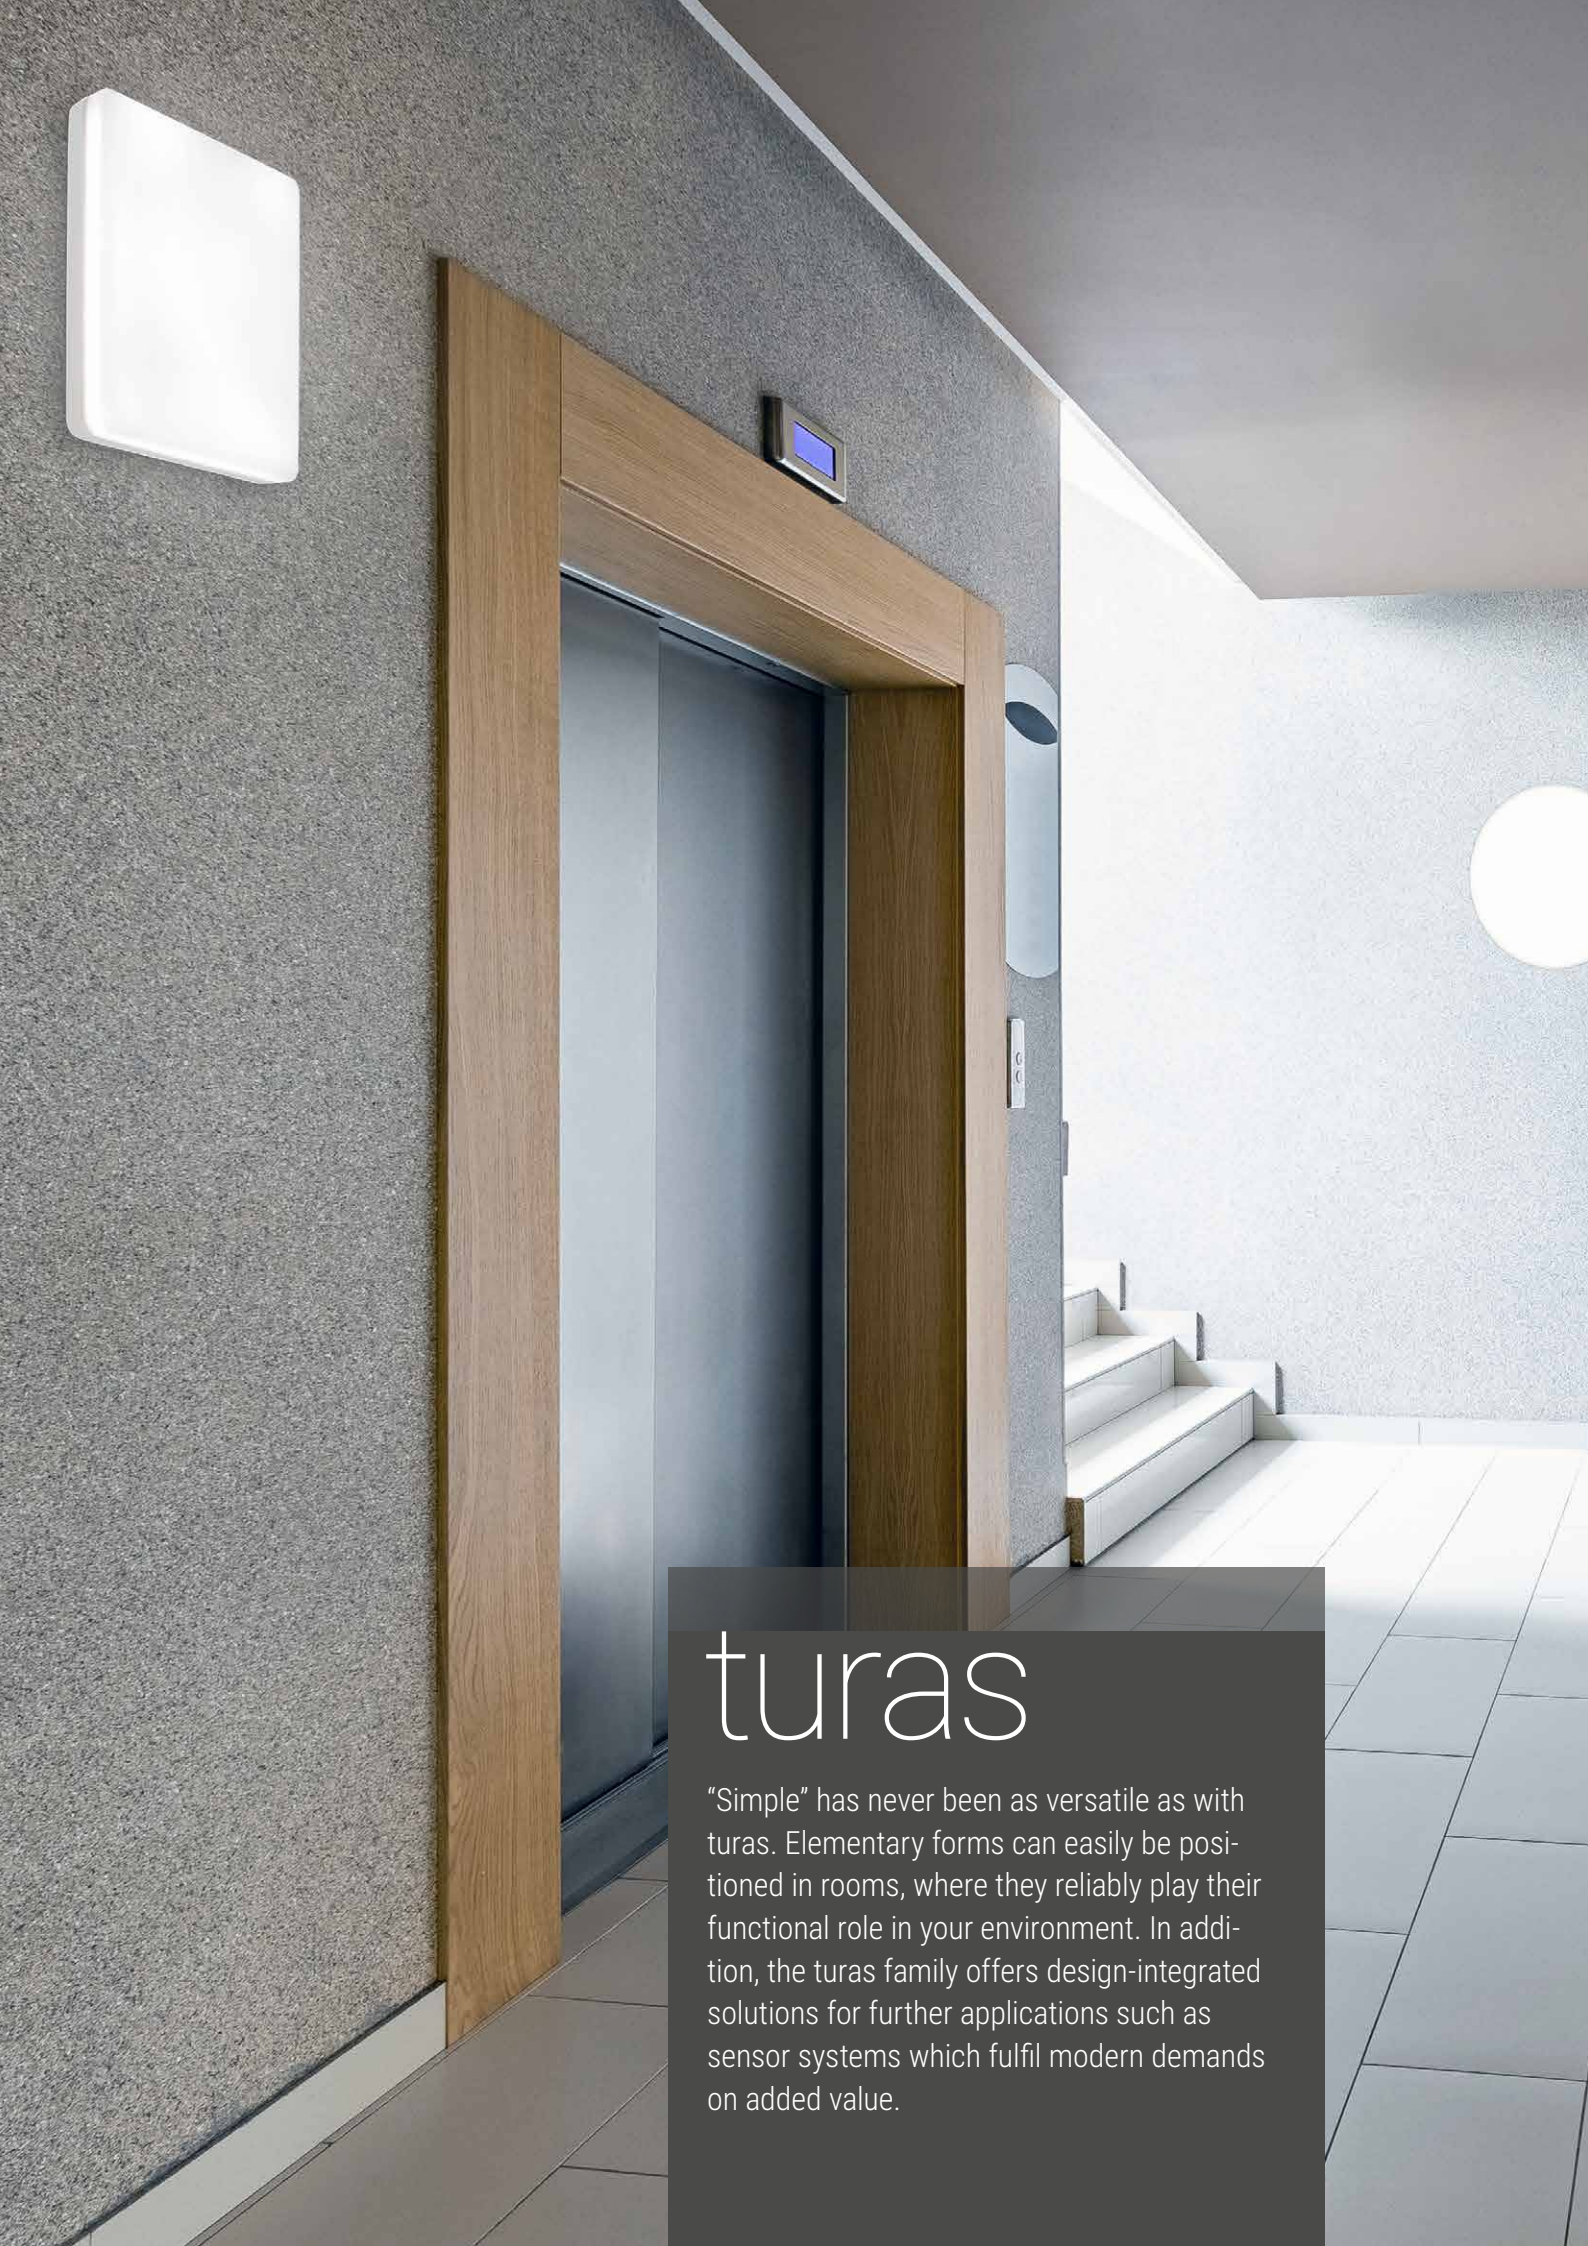

















# turas

“Simple” has never been as versatile as with turas. Elementary forms can easily be positioned in rooms, where they reliably play their functional role in your environment. In addition, the turas family offers design-integrated solutions for further applications such as sensor systems which fulfil modern demands on added value.

# turas

Luminaire family  
Versatility at a glance



turas	ET	DALI	R 380	R 500	Q 400x400			
Light colour			830	840	830	840		
Luminous flux lm			1600 2700	1700 2900	4000	4300	1600 2600	1700 2900
netlife controls			 easy41	 easy41	 easy25	 easy41		
netlife with Casambi technology			 2700 lm flex10	 2900 lm flex10				
Emergency lighting B3								
Emergency lighting Central battery								
Insect protection								
Theft protection								

# turas

Luminaire family

136  
lm/W

3000 K  
4000 K



DIN EN  
12464-1

IP40



## Highlights

- Ideal for corridors, stairwells and care facilities
- Easyfix quick-fit mounting: button for simple unlocking of the luminaire unit
- Push-fit theft protection
- Effective insect protection ring in the diffuser
- HF sensor for ET and DALI including corridor function
- Integrated module for single B3 battery and central emergency power supply
- LED assemblies can be exchanged in accordance with EU Ecodesign Directive
- Extremely long service life: L80 B10 50,000 h



Optimum homogeneous light distribution thanks to individual LED lens




Insect protection ring

Mounting plate



# simple has never been as versatile

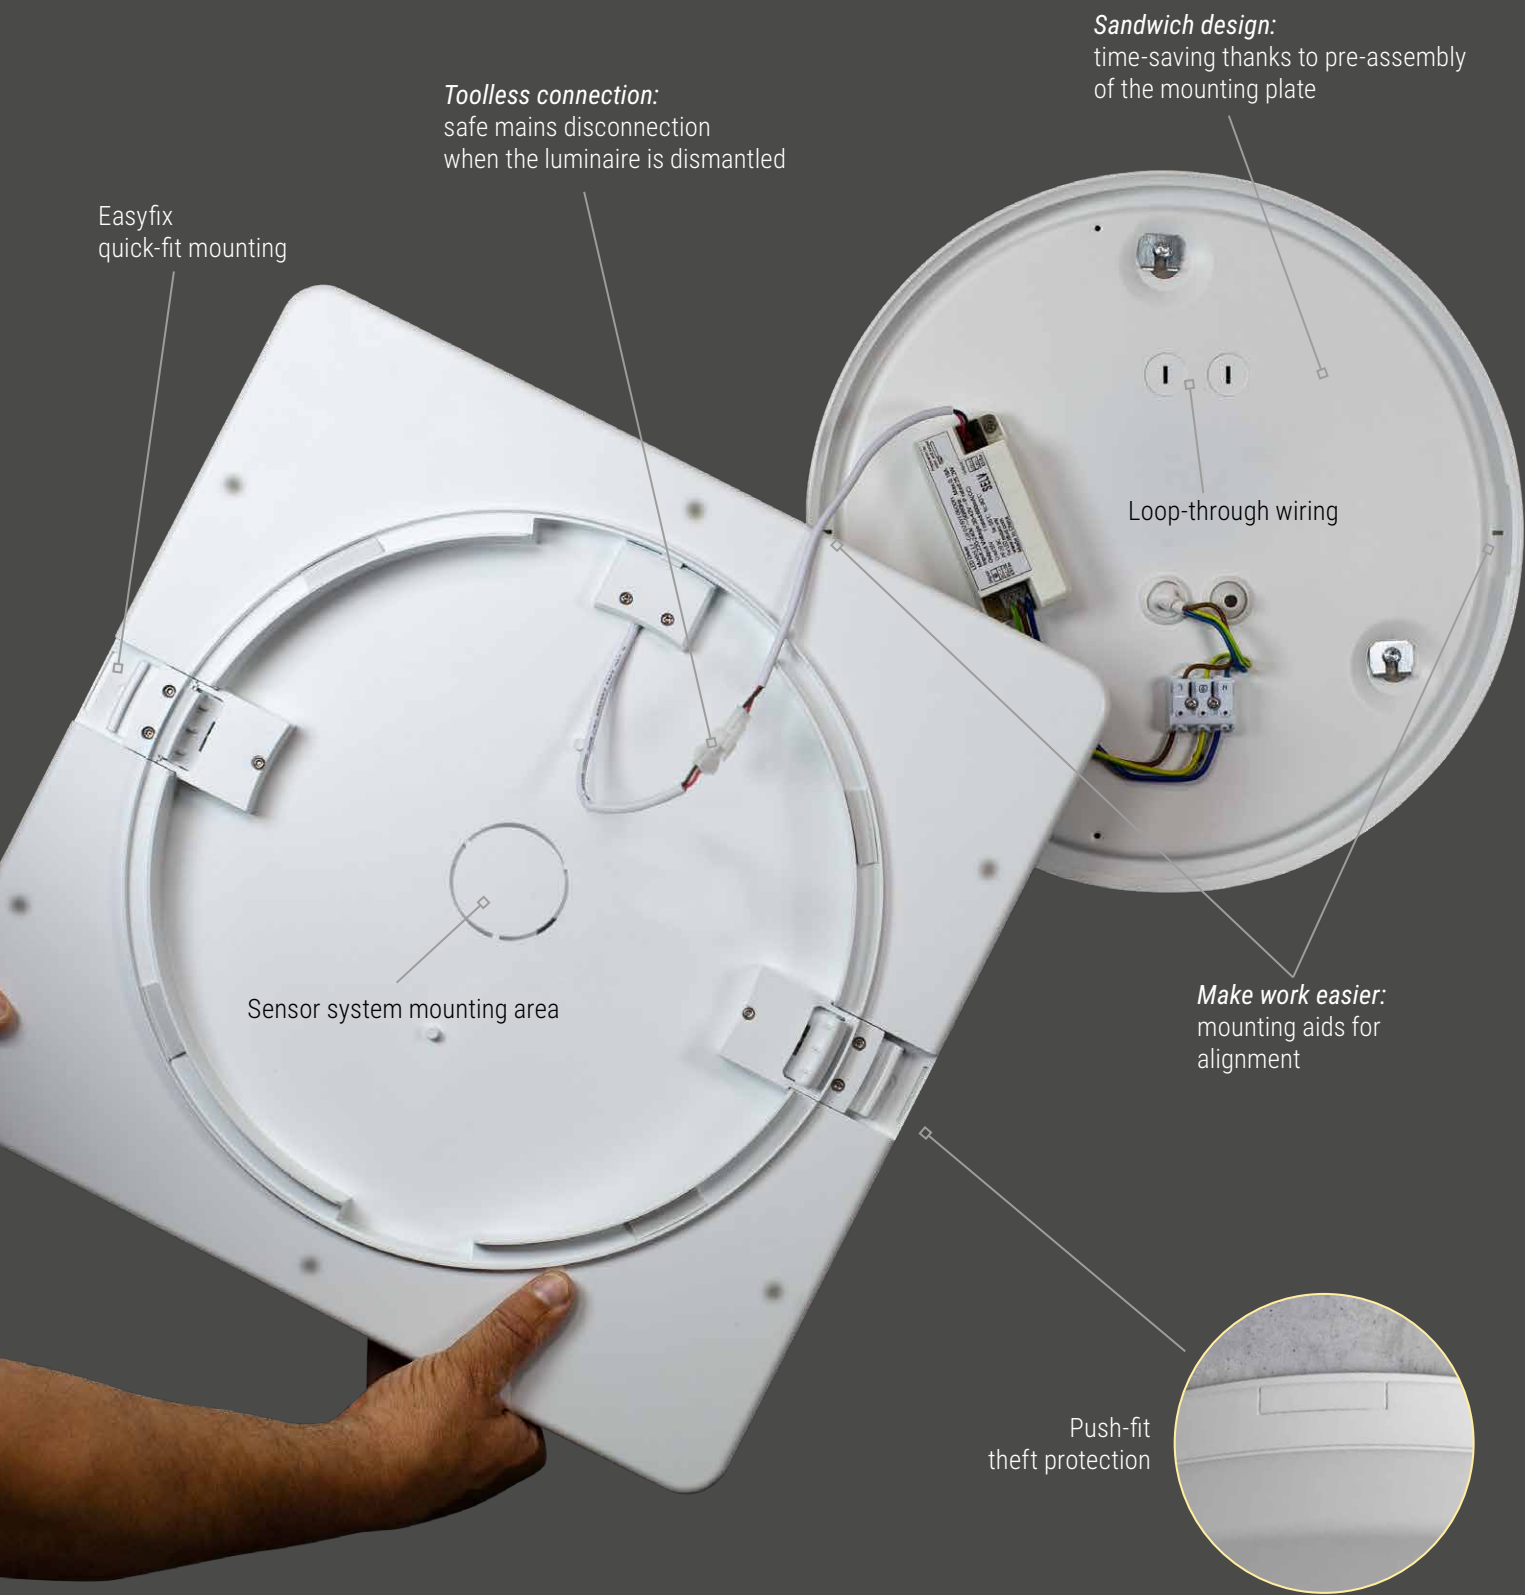

**Toolless connection:**  
safe mains disconnection  
when the luminaire is dismantled

Easyfix  
quick-fit mounting

Sensor system mounting area

**Sandwich design:**  
time-saving thanks to pre-assembly  
of the mounting plate

Loop-through wiring

**Make work easier:**  
mounting aids for  
alignment

Push-fit  
theft protection

# turas



turas-TUARO/500 LED ws



turas-TUARO/380 LED ws



### Mounting:

- ceiling surface
- wall mounting

### Housing:

- polycarbonate, sheet steel mounting plate
- Colour white (ws), RAL 9003
- Visible height TUARO/380: 52 mm
- Visible height TUARO/500: 61 mm
- TA +10–35°C\* (IK03)

### TUARO lighting technology:

- LED Individual Lens Optic
- Diffuser opal matt, plastic PMMA
- Direct/indirect distribution

### Lamp:

- LED 50000h L80/B10
- CRI ≥ 80/3000 K, 4000 K



### Switching:

- electronic driver ET/DALI
- 230 V 50 Hz

### Fields of application:

- Housing
- Corridors
- Staircases
- Entrance areas
- Waiting rooms
- Ancillary rooms, technical plant rooms


Dimensions	Versions	LxBxH/DxH	A1	Alternative A1
TUARO/380	LED	380 x 69	208	180
TUARO/500	LED	500 x 76	277	240

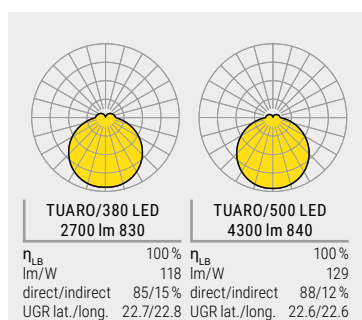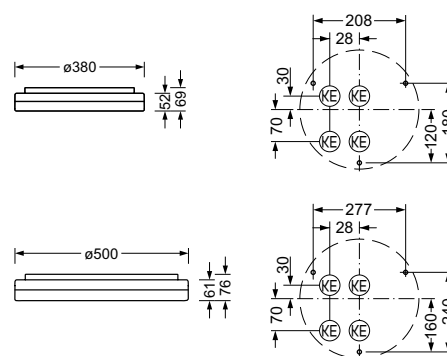







Type	Lamps	lm/W	P <sub>sys</sub> [W]	Ballast	Art. no.	Ballast <sup>1)</sup>	Art. no.	
------	-------	------	----------------------	---------	----------	-----------------------	----------	---

LED single-lens optics and matt opal diffuser Direct/indirect beam distribution.

turas-TUARO/380 	LED 1600 830	125	13	ED	2190 3024 180	DALI	2190 3026 680	1.80
	LED 1700 840	136	13	ED	2190 3014 180	DALI	2190 3016 680	1.80
	LED 2700 830	118	23	ED	2190 6024 180	DALI	2190 6026 680	1.80
	LED 2900 840	129	23	ED	2190 6014 180	DALI	2190 6016 680	1.80

turas-TUARO/500 	LED 4000 830	118	34	ED	2190 5024 180	DALI	2190 5026 680	3.10
	LED 4300 840	129	34	ED	2190 5014 180	DALI	2190 5016 680	3.10

<sup>1)</sup>Luminaires suitable for IoT (Internet of Things): 

Replacement parts	Type	Colour	Material	Details	Art. no.		
	Diffuser TUARO /380	tz	PMMA	D=380mm for TUARO/380	2190 9380 180	0.90	1
	Diffuser TUARO /500	tz	PMMA	D=500mm for TUARO/500	2190 9500 180	1.46	1

# turas



turas-TUAQO/400 LED ws



3000 K  
4000 K



A++



CE IP40

### Mounting:

- ceiling surface
- wall mounting

### Housing:

- polycarbonate, sheet steel mounting plate
- Colour white (ws) RAL 9003
- Visible height TUAQO/400: 52 mm
- TA +10–35°C\* (IK02)

### TUAQO lighting technology:

- LED Individual Lens Optic
- Diffuser opal matt, plastic PMMA
- Direct/indirect distribution

### Lamp:


- LED 50000 h L80/B10
- CRI ≥ 80/3000 K, 4000 K

### Switching:


- electronic driver ED/DALI
- 230 V 50 Hz

### Fields of application:

- Housing
- Corridors
- Staircases
- Entrance areas
- Waiting rooms
- Ancillary rooms, technical plant rooms

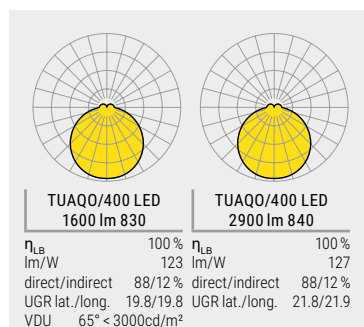


Dimensions	Designs	LxBxH/DxH	A1	Alternative A1
TUAQO/400	LED	400 x 400 x 69	208	180

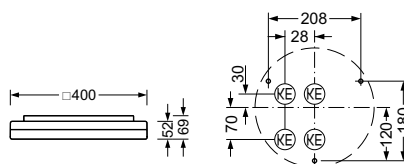






turas-TUAQO	Lamps	lm/W	P <sub>sys</sub> [W]	Ballast	Art. no.	Ballast <sup>1)</sup>	Art. no.	kg
<i>LED Individual Lens Optic and opal diffuser, direct/indirect light distribution</i>								
turas-TUAQO/400	LED 1600 830	123	13	ED	2190 4024 180	DALI	2190 4026 680	2.40
	LED 1700 840	134	13	ED	2190 4014 180	DALI	2190 4016 680	2.40
	LED 2600 830	116	23	ED	2190 8024 180	DALI	2190 8026 680	2.40
	LED 2900 840	127	23	ED	2190 8014 180	DALI	2190 8016 680	2.40



<sup>1)</sup>Luminaires suitable for IoT (Internet of Things): 

Replacement parts	Type	Colour	Material	Details	Art. no.	kg	
	Diffuser TUAQO /400	tz	PMMA	L/W=400mm for TUAQO LED	2190 9400 180	1.20	1



## turas – safety lighting

The green LED indicates that emergency lighting is ready for operation. The safety luminaire is independent of the general power supply and should allow people to leave the premises safely in the event of a power failure. The standard-compliant integrated emergency lighting is available as an individual battery version or for a central emergency power supply.

Emergency lighting B3	Lamps	lm/W	P <sub>sys</sub> [W]	Ballast	LxBxH/DxH	Art. no.	
<i>LED Individual Lens Optic and opal diffuser, direct/indirect light distribution</i>							
turas-TUARO/380	LED 2700 830	118	23	ED NL-B3	380 x 69	2190 6324 180	2.10
	LED 2900 840	129	23	ED NL-B3	380 x 69	2190 6314 180	2.10
turas-TUARO/500	LED 4000 830	118	34	ED NL-B3	500 x 76	2190 5324 180	3.40
	LED 4300 840	129	34	ED NL-B3	500 x 76	2190 5314 180	3.40
turas-TUAQO/400	LED 2600 830	116	23	ED NL-B3	400 x 400 x 69	2190 8324 180	2.60
	LED 2900 840	127	23	ED NL-B3	400 x 400 x 69	2190 8314 180	2.60

Central battery	Lamps	lm/W	P <sub>sys</sub> [W]	Ballast	LxBxH/DxH	Art. no.	
<i>LED Individual Lens Optic and opal diffuser, direct/indirect light distribution</i>							
turas-TUARO/500	LED 4000 830	118	34	ED ZB	500 x 76	2190 5524 180	3.19
	LED 4300 840	129	34	ED ZB	500 x 76	2190 5514 180	3.19

NL-B3-luminaires TA max. 30 °C



You can now control your luminaire by app!

Simply smart: the turas **easy25** and **flex10** luminaires can be controlled and configured by hand via Bluetooth using the corresponding app – with no great effort at all

The simple solution

The turas **easy41** is our economic solution – wired and switching, but still with sensor system for daylight and movement.

netlife	Communication	Control signal	Detection range	Installation height	Control-ers	Functions
<b>easy41</b>		ON/OFF		2-6 m	800 W	HF sensor: Motion detection, light threshold value
<b>easy25</b>		DALI		2-3 m	max. 15	HF sensor: Corridor function, guided light, daylight control, manual dimming, motion detection
<b>flex10</b>		DALI			max. 1	Control and manual dimming via Casambi app, can be linked to further Casambi modules

	Lamps	lm/W	P <sub>sys</sub> [W]	Ballast	LxWxDxH	Art. no.	
<i>LED Individual Lens Optic and opal diffuser, direct/indirect light distribution</i>							
turas-TUARO/380	LED 2700 830	118	23	ED easy41	380 x 69	2190 6424 180	1.90
	LED 2900 840	129	23	ED easy41	380 x 69	2190 6414 180	1.90
turas-TUARO/500	LED 4000 830	118	34	ED easy41	500 x 76	2190 5424 180	3.22
	LED 4300 840	129	34	ED easy41	500 x 76	2190 5414 180	3.22
turas-TUAQO/400	LED 2700 830	118	23	ED easy41	400 x 400 x 69	2190 8424 180	2.42
	LED 2900 840	127	23	ED easy41	400 x 400 x 69	2190 8414 180	2.42
turas-TUARO/500	LED 4000 830	118	34	DALI easy25	500 x 76	2190 5226 680	3.22
	LED 4300 840	129	34	DALI easy25	500 x 76	2190 5216 680	3.22
turas-TUARO/380	LED 2700 830	118	23	DALI flex10	380 x 69	2190 6626 680	1.90
	LED 2900 840	127	23	DALI flex10	380 x 69	2190 6616 680	1.90

Accessories	Colour	Details	Art. no.	
LC-RX FLEX BT PB 2W	ws	Bluetooth wall button 2-channel, 1 rocker, without battery	8450 8107 100	0.23
LC-RX FLEX BT PB 4W	ws	Bluetooth wall button 4-channel, 2 rockers, without battery	8450 8108 100	0.23



## Image index

Page	1	composing: concept w · stock.adobe.com
	2	composing: Maksim · stock.adobe.com
	6	composing: upixa · stock.adobe.com
	8	composing: Artur Golbert · stock.adobe.com
	9	composing: denisismagilov · stock.adobe.com
	10	composing: MATTHIAS BUEHNER · stock.adobe.com
	12	composing: Yuri Bizgajmer · 123rf.com

9999 1641 220 1.A. 1.500 09/20 MA/SCH Subject to modifications

REGIOLUX @ SOCIAL MEDIA



Regiolux vcard



**REGIOLUX**

Regiolux GmbH  
Hellinger Straße 3  
D 97486 Königsberg  
T +49 9525 89 0  
info@regiolux.de  
www.regiolux.de