netlife flex system; in-house project engineering or by customer; easy installation, extended functions and variable settings; easy commissioning per app, exteded interconnectabilities

CHARACTERISTICS
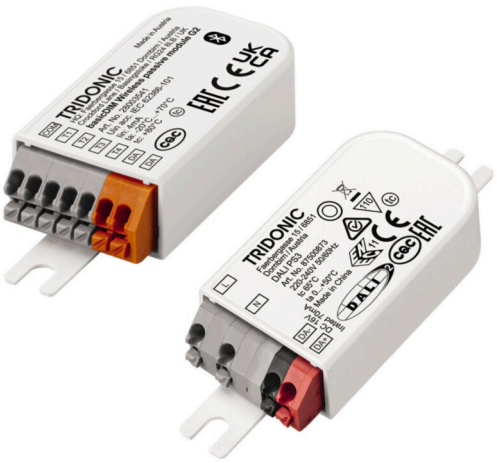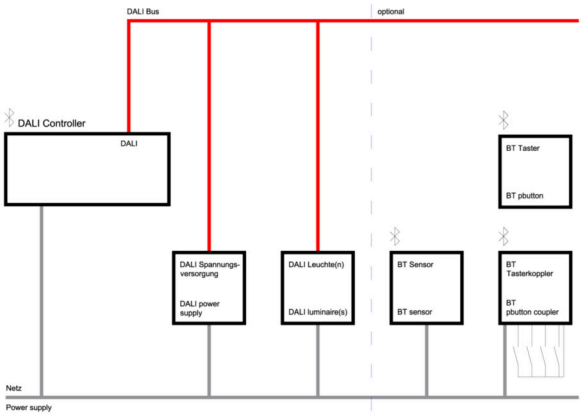
Regiolux Classification	netlife flex
Control signal	DALI, Radio
Number of control gear (max)	32
Communication	Bluetooth
App name	Casambi, 4remote BT
System compatibility	easy01S; flex10; flex10X; flex10L; flex37; flex39
Note	compatible with Casambi
Application	Office, Meeting rooms, Secondary rooms, Retail, Industry, Logistics centres, Corridors, Garages, Classrooms
Function	Motion detection*, Corridor function*, Guided Light*, HCL (only with DT8 luminaires), presence detection*, Daylight control*, Tunable white (only with DT8 luminaires), Manual dimming, *only by auxiliary devices