

Accessories - Control system accessories electrical engineering - netlife module for agila

Housing colour traffic white RAL 9016; . Light Control: netlife easyM5S5; Regiolux Classification: netlife easy; Control signal: DALI broadcast; Number of control gear (max): 32; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 2m to 5m; Monitoring area: max. D=7m; Remote control: 84501041200; Optional remote control: 84501042100; Application: Office, Secondary rooms, Meeting rooms, Classrooms, Corridors; Function: Motion detection, presence detection, Daylight control, Manual dimming, Corridor function.

**CHARACTERISTICS**

Order number	60609000100
EAN number	4020863448364
Commodity code	90328900
Certification mark	IP 20, Indoor, CE

**ELECTRICAL ENGINEERING**

Mains voltage	230V/50Hz
---------------	-----------

**MECHANICS**



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	160mm x 51mm x 69mm
Weight (net)	0.08kg
Type of installation	Ceiling-mounted single installation, Pendant individual mounting, Pendant light strip mounting

**Dimensions**

L	160 mm	Length
B	51 mm	Width
H	69 mm	Height

**DEEP-LINK**


<https://www.regiolux.de/en/article/60609000100>



## LC SYSTEM

### CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	DALI broadcast
Number of control gear (max)	32
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	2m to 5m
Remote control	84501041200
Optional remote control	84501042100
Application	Office, Secondary rooms, Meeting rooms, Classrooms, Corridors
Function	Motion detection, presence detection, Daylight control, Manual dimming, Corridor function

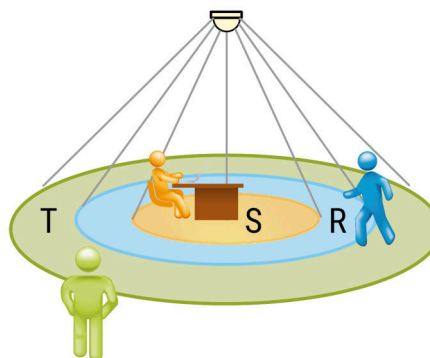

### MONITORING AREA

Mounting Height	2,5m	3,5m	5m
Ø max. sitting[S]	3,3m	5m	-
Ø max. radial[R]	5,3m	7m	7m
Ø max. tangential[T]	-	-	-

