

Accessories - Control system+sensor - netlife module for worker

Housing colour white; Light Control: netlife easy7; Regiolux Classification: netlife easy; Control signal: DALI2-broadcast; Supported DALI parts: 201 (DT0), 207 (DT6), 208 (DT7); Number of control gear (max): 40; DALI-output nom.: 80mA; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 5m to 16m; Monitoring area: max. 30m x 19m; Remote control: 84506028100 max. MH=8m; Optional remote control: 84506021200 +App; App name: B.E.G. One; System extension: easy20; Application: Corridors, Garages, Industry, Logistics centres; Function: Motion detection, Daylight control, Manual dimming.

CHARACTERISTICS

Order number	37290008100
EAN number	4020863347254
Commodity code	90328900
Certification mark	IP 54, Indoor, CE

ELECTRICAL ENGINEERING

Mains voltage	230V/50Hz
---------------	-----------

MECHANICS


Housing colour	white
Dimensions (LxWxDxH)	110mm x 110mm x 145mm
Weight (net)	1kg
Type of installation	Ceiling-mounted single installation, Pendant individual mounting, Pendulum mounting rail assembly on chain

Dimensions

L	110 mm	Length
B	110 mm	Width
H	145 mm	Height

DEEP-LINK


<https://www.regiolux.de/en/article/37290008100>



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	DALI2-broadcast
Supported DALI parts	201(DT0), 207(DT6), 208(DT7)
Number of control gear (max)	40
DALI-output nom.	80mA
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	5m to 16m
Remote control	84506028100 max. MH=8m
Optional remote control	84506021200 +App
App name	B.E.G. One
System extension	easy20
Application	Corridors, Garages, Industry, Logistics centres
Function	Motion detection, Daylight control, Manual dimming

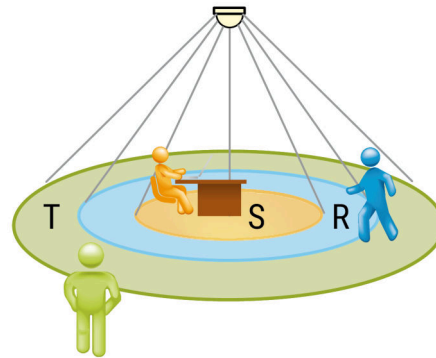

MONITORING AREA

Mounting Height	14m	16m
Ø max. sitting[S]	-	-
Ø max. radial[R]	30x19m	30x19m
Ø max. tangential[T]	30x19m	30x19m

