

Slave sensor

Slave sensor motion for ceiling surface mounting. Motion detector, slave with oval and long-range detection range as surface mounting version, significant potential for energy savings, particularly in large rooms and for monitoring large areas; only one master necessary for light switching; motion detection in all room segments possible with slaves; switching pulse to the master in the case of detected movement; recognition of the movement independent of ambient brightness Safety cage optional.

CHARACTERISTICS

Order number	84506003100
EAN number	4020863270002
Commodity code	90328900
Certification mark	IP 54, Protection class II, CE

ELECTRICAL ENGINEERING

Mains voltage	110-240V/50-60Hz
---------------	------------------

MECHANICS


Housing colour	white
Dimensions (LxWxH/DxH)	98mm x 63mm
Weight (net)	0.131kg
Type of installation	Ceiling-mounted single installation

Dimensions

H	63 mm	Height
D	98 mm	Diameter

DEEP-LINK

<https://www.regiolux.de/en/article/84506003100>

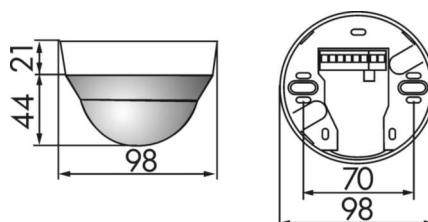

LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	Slave signal
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	5m to 16m
System compatibility	easy07; easy12
System extension	easy20
Application	Industry, Logistics centres, Garages, Corridors
Function	Motion detection



MONITORING AREA

Mounting Height	14m	16m
Ø max. sitting[S]	-	-
Ø max. radial[R]	30x19m	30x19m
Ø max. tangential[T]	30x19m	30x19m

