

Accessories - Pattern wire suspension with ceiling cylinder

Rectangular canopy L=317mm sg, metal ceiling cylinder, 2 wires D=1.2 L=1900; Housing colour silver grey/white aluminium RAL 9006; . Anschlussleitung 5x0,75. Light Control: netlife easy01C; Regiolux Classification: netlife easy; Control signal: DALI; Number of control gear (max): 32; Communication: Bluetooth; App name: Osram BT Config; Osram BT Control; Note: up to 4 DALI sensors or DALI push button coupler can also be connected; System extension: easy01S; Application: Office, Meeting rooms, Corridors, Classrooms, Secondary rooms; Function: Motion detection*, Corridor function*, presence detection*, Daylight control*, Tunable white (only with DT8 luminaires), Manual dimming, *only by auxiliary devices. Suspension set without cross-spans Operation and configuration via the Osram BT Control app.

CHARACTERISTICS

Order number	91100125135
EAN number	4020863377695
Commodity code	94059900
Certification mark	Indoor, CE

ELECTRICAL ENGINEERING

Wiring	5x0.75mm ²
--------	-----------------------

MECHANICS



Housing colour	silver grey/white aluminium RAL 9006
Dimensions (LxWxDxH)	317mm x 44.5mm x 39mm
Weight (net)	0.58kg
Type of installation	Pendant individual mounting, Pendant light strip mounting

Dimensions

L	317 mm	Length
B	44.5 mm	Width
H	39 mm	Height

DEEP-LINK

<https://www.regiolux.de/en/article/91100125135>

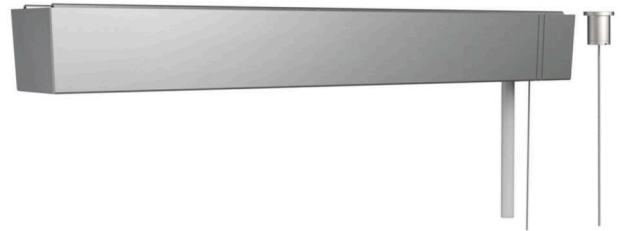

LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	DALI
Number of control gear (max)	32
Communication	Bluetooth
App name	Osram BT Config; Osram BT Control
Note	up to 4 DALI sensors or DALI push button coupler can also be connected
System extension	easy01S
Application	Office, Meeting rooms, Corridors, Classrooms, Secondary rooms
Function	Motion detection*, Corridor function*, presence detection*, Daylight control*, Tunable white (only with DT8 luminaires), Manual dimming, *only by auxiliary devices

