

Control system+sensor

Light/motion sensor for ceiling surface mounting. Wireless motion detector DALI2 certified; compatible with Casambi; integrated light sensor for automatic Constant Light Output; activation of max. 32 DALI controllers in Broadcast; settings and configuration through Casambi app; mounting height 5-16m. Safety cage optional

CHARACTERISTICS

Order number	84508111201
EAN number	4020863465545
Commodity code	85176200
Certification mark	IP 54, Protection class II, CE

ELECTRICAL ENGINEERING

Mains voltage	230V/50Hz
Control signal	DALI2-broadcast, Radio

MECHANICS



Housing colour	white
Dimensions (LxWxH/DxH)	101mm x 76mm
Weight (net)	0.095kg
Type of installation	Ceiling-mounted single installation

Dimensions

H	76 mm	Height
D	101 mm	Diameter

DEEP-LINK


<https://www.regiolux.de/en/article/84508111201>



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife flex
Control signal	DALI2-broadcast, Radio
Number of control gear (max)	32
Communication	Bluetooth
Sensor technology	PIR - passive infrared
Installation height (min/max)	5m to 16m
App name	Casambi
System compatibility	flex10; flex10X; flex10L; flex37; flex39
Note	compatible with Casambi
System extension	flex37
Application	Industry, Logistics centres
Function	Motion detection, Corridor function, Guided Light, Daylight control

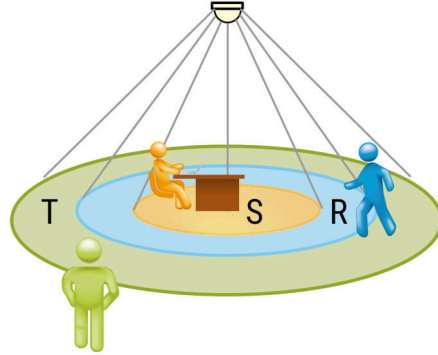

MONITORING AREA

Mounting Height	14m	16m
Ø max. sitting[S]	-	-
Ø max. radial[R]	30x19m	30x19m
Ø max. tangential[T]	30x19m	30x19m

