

netlife light management function module device mount

Blank cover made of galvanised, profiled sheet steel; surface with polyester resin enamel coating; with two rotary catches for rapid fitting in the mounting rail, for the integration of sensors and control unit in the light run; Housing colour traffic white RAL 9016; Light Control: netlife easy7; Regiolux Classification: netlife easy; Control signal: DALI2-broadcast; Supported DALI parts: 201(DT0), 207(DT6), 208(DT7); Number of control gear (max): 40; DALI-output nom.: 80mA; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 5m to 16m; Monitoring area: max. 30m x 19m; Remote control: 84506028100 max. MH=8m; Optional remote control: 84506021200 +App; App name: B.E.G. One; System extension: easy20; Application: Corridors, Garages, Industry, Logistics centres; Function: Motion detection, Daylight control, Manual dimming. Wired ready for connection via integrated connector.

Limited phase selection when pushbuttons and/or slave sensors are used. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system.

CHARACTERISTICS

Order number	84186580224
EAN number	4020863356539
Commodity code	90328900
Certification mark	IP 20, Indoor, CE
Special properties	Ready for IoT

ELECTRICAL ENGINEERING

Controller	easy07
Mains voltage	230V/50Hz

MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	1532mm x 102mm x 99mm
Weight (net)	1.1kg
Type of installation	Mounting rail system installation, Ceiling-mounted mounting rail installation, Ceiling-mounted mounting rail installation on T-system, Pendulum mounting rail assembly on chain, Pendulum mounting rail installation on steel cable

Dimensions

L	1532 mm	Length
B	102 mm	Width
H	99 mm	Height

DEEP-LINK


<https://www.regiolux.de/en/article/84186580224>



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	DALI2-broadcast
Supported DALI parts	201(DT0), 207(DT6), 208(DT7)
Number of control gear (max)	40
DALI-output nom.	80mA
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	5m to 16m
Remote control	84506028100 max. MH=8m
Optional remote control	84506021200 +App
App name	B.E.G. One
System extension	easy20
Application	Corridors, Garages, Industry, Logistics centres
Function	Motion detection, Daylight control, Manual dimming

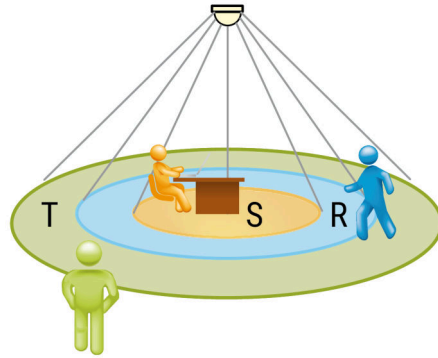

MONITORING AREA

Mounting Height	14m	16m
Ø max. sitting[S]	-	-
Ø max. radial[R]	30x19m	30x19m
Ø max. tangential[T]	30x19m	30x19m

