

netlife light management function module device mount

Blank cover made of galvanised, profiled sheet steel; surface with polyester resin enamel coating; with two rotary catches for rapid fitting in the mounting rail, for the integration of sensors and control unit in the light run; Housing colour traffic white RAL 9016; . Light Control: netlife easy20; Regiolux Classification: netlife easy; Control signal: Slave signal; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 5m to 16m; Monitoring area: max. 30m x 19m; System compatibility: easy07; easy12; System extension: easy20; Application: Industry, Logistics centres, Garages, Corridors; Function: Motion detection. Wired ready for connection via integrated connector. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system.

CHARACTERISTICS

Order number	84186580201
EAN number	4020863263431
Commodity code	90328900
Certification mark	IP 20, Indoor, CE
Special properties	Advanced Services

ELECTRICAL ENGINEERING

Controller	easy20
Mains voltage	230V/50Hz

MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	1532mm x 102mm x 99mm
Weight (net)	1.1kg
Type of installation	Mounting rail system installation, Ceiling-mounted mounting rail installation, Ceiling-mounted mounting rail installation on T-system, Pendulum mounting rail assembly on chain, Pendulum mounting rail installation on steel cable

Dimensions

L	1532 mm	Length
B	102 mm	Width
H	99 mm	Height

DEEP-LINK


https://www.regiolux.de/en/article/84186580201



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	Slave signal
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	5m to 16m
System compatibility	easy07; easy12
System extension	easy20
Application	Industry, Logistics centres, Garages, Corridors
Function	Motion detection

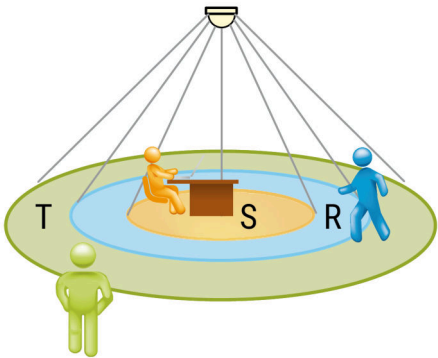

MONITORING AREA

Mounting Height	14m	16m
Ø max. sitting[S]	-	-
Ø max. radial[R]	30x19m	30x19m
Ø max. tangential[T]	30x19m	30x19m

