

Variable Device mount functional module netlife light management

Device mount made of a galvanised, profiled steel sheet; surface with polyester resin enamel coating; with two rotary catches for rapid fitting in the mounting rail, for the integration of sensors and control unit in the light run; can be positioned variable on the mounting rail. Housing colour traffic white RAL 9016; Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife easy7; Regiolux Classification: netlife easy; Control signal: DALI2-broadcast; Supported DALI parts: 201(DT0), 207(DT6), 208(DT7); Number of control gear (max): 40; DALI-output nom.: 80mA; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 5m to 16m; Monitoring area: max. 30m x 19m; Remote control: 84506028100 max. MH=8m; Optional remote control: 84506021200 +App; App name: B.E.G. One; System extension: easy20; Application: Corridors, Garages, Industry, Logistics centres; Function: Motion detection, Daylight control, Manual dimming. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. netlife easy system; straightforward in-house project engineering; easy installation; preset functions; simple commissioning via remote control, app, DIP switch, rotary knob, etc.

CHARACTERISTICS

Order number	19150700070
EAN number	4020863421282
Commodity code	90328900
Certification mark	IP 20, Protection class I, F, HACCP DIN10500/Food/IFS-application-related suitability/BRC, Indoor, CE
Special properties	Advanced Services

ELECTRICAL ENGINEERING

Controller	easy07
Mains voltage	230V/50Hz

MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	765mm x 102mm x 99mm
Weight (net)	0.9kg
Type of installation	Mounting rail system installation, Ceiling-mounted light structure, Pendant light structure

Dimensions

L	765 mm	Length
B	102 mm	Width
H	99 mm	Height

DEEP-LINK


<https://www.regiolux.de/en/article/19150700070>



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	DALI2-broadcast
Supported DALI parts	201(DT0), 207(DT6), 208(DT7)
Number of control gear (max)	40
DALI-output nom.	80mA
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	5m to 16m
Remote control	84506028100 max. MH=8m
Optional remote control	84506021200 +App
App name	B.E.G. One
System extension	easy20
Application	Corridors, Garages, Industry, Logistics centres
Function	Motion detection, Daylight control, Manual dimming

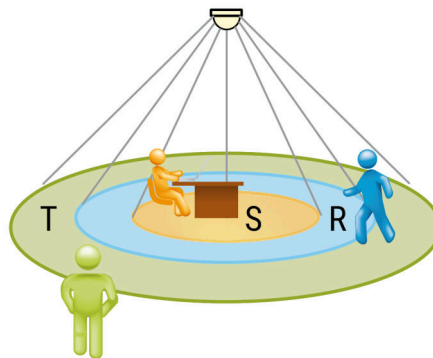

MONITORING AREA

Mounting Height	14m	16m
Ø max. sitting[S]	-	-
Ø max. radial[R]	30x19m	30x19m
Ø max. tangential[T]	30x19m	30x19m

