

Variable Device mount functional module netlife light management

Device mount made of a galvanised, profiled steel sheet; surface with polyester resin enamel coating; with two rotary catches for rapid fitting in the mounting rail, for the integration of sensors and control unit in the light run; can be positioned variable on the mounting rail. Housing colour traffic white RAL 9016; . Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife pro8; Regiolux Classification: netlife pro; Control signal: DALI2 (Part 303, 304); Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 5m to 16m; Monitoring area: max. 30m x 19m; System compatibility: Central DALI2 controllers; DALI system power: 7mA; Note: mounted longitudinally; Application: Industry, Logistics centres; Function: Motion detection, Corridor function, Guided Light, Daylight control. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. netlife pro; programmable systems; project engineering support by Regiolux; more complex installation; free functions and multiple settings; visualisation; programming and commissioning; interconnectivity and radio solutions; IoT and cloud-capable

CHARACTERISTICS

Order number	19150700080
EAN number	4020863421305
Commodity code	90328900
Certification mark	IP 20, Protection class I, F, HACCP DIN10500/Food/IFS-application-related suitability/BRC, Indoor, CE
Special properties	Advanced Services

ELECTRICAL ENGINEERING

Controller	pro08
------------	-------

MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	765mm x 102mm x 99mm
Weight (net)	0.9kg
Type of installation	Mounting rail system installation, Ceiling-mounted light structure, Pendant light structure

Dimensions

L	765 mm	Length
B	102 mm	Width
H	99 mm	Height

DEEP-LINK


<https://www.regiolux.de/en/article/19150700080>



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife pro
Control signal	DALI2 (Part 303, 304)
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	5m to 16m
System compatibility	Central DALI2 controllers
DALI system power	7mA
Note	mounted longitudinally
Application	Industry, Logistics centres
Function	Motion detection, Corridor function, Guided Light, Daylight control

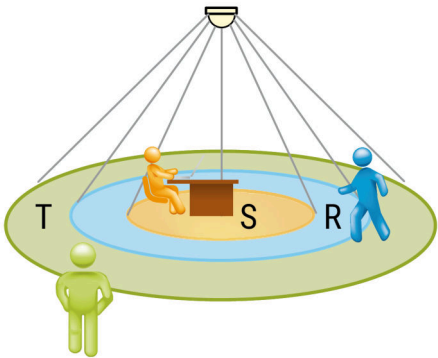

MONITORING AREA

Mounting Height	14m	16m
Ø max. sitting[S]	-	-
Ø max. radial[R]	30x19m	30x19m
Ø max. tangential[T]	30x19m	30x19m

