

IP 54 variable Device mount functional module netlife light management

Device mounts made of galvanised, profiled sheet steel with zinc coating combined with polyester resin paint guarantee good corrosion protection; tool-free attachment with integrated rotary catches for rapid fitting in the support rail. Integrated end faces made of plastic with sealing lips and an all-round closed seal to the support rail for a protection type up to IP54. For integrating sensor technology and the control unit into the light run; can be positioned variably in the support rail. Housing colour traffic white RAL 9016; . Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife easy22; Regiolux Classification: netlife easy; Control signal: DALI2 (Part 303, 304), Slave signal; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 4m to 14m; Monitoring area: max. 30m x 4m; System compatibility: easy21, central DALI2 controller; DALI system power: 6mA; System extension: easy22; Application: Industry, Logistics centres, Corridors, Garages; Function: Motion detection, Daylight control. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. netlife easy system; straightforward in-house project engineering; easy installation; preset functions; simple commissioning via remote control, app, DIP switch, rotary knob, etc.

## CHARACTERISTICS

Order number	19152700220
EAN number	4020863421527
Commodity code	90328900
Certification mark	IP 54, HACCP DIN10500/Food/IFS-application-related suitability/BRC, Indoor, CE
Special properties	Advanced Services

## ELECTRICAL ENGINEERING

Controller	easy22
Mains voltage	230V/50Hz

## MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	765mm x 95mm x 88mm
Weight (net)	0.9kg
Type of installation	Mounting rail system installation, Ceiling-mounted light structure, Pendant light structure

## Dimensions

L	765 mm	Length
B	95 mm	Width
H	88 mm	Height

## DEEP-LINK


<https://www.regiolux.de/en/article/19152700220>



## LC SYSTEM

### CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	DALI2 (Part 303, 304), Slave signal
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	4m to 14m
System compatibility	easy21, central DALI2 controller
DALI system power	6mA
System extension	easy22
Application	Industry, Logistics centres, Corridors, Garages
Function	Motion detection, Daylight control

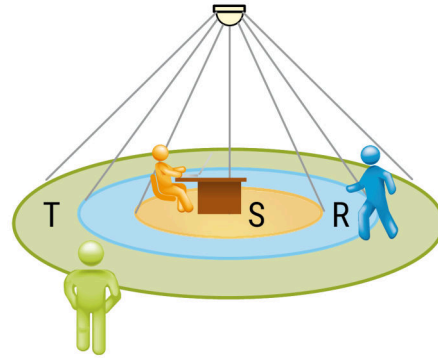

### MONITORING AREA

Mounting Height	5m	10m	14m
Ø max. sitting[S]	-	-	-
Ø max. radial[R]	13,5x3,5m	27,5x3,5m	30x3,5m
Ø max. tangential[T]	13,5x3,5m	27,5x3,5m	30x3,5m

