

IP 54 variable Device mount functional module netlife light management

Device mounts made of galvanised, profiled sheet steel with zinc coating combined with polyester resin paint guarantee good corrosion protection; tool-free attachment with integrated rotary catches for rapid fitting in the support rail. Integrated end faces made of plastic with sealing lips and an all-round closed seal to the support rail for a protection type up to IP54. For integrating sensor technology and the control unit into the light run; can be positioned variably in the support rail. Housing colour traffic white RAL 9016; . Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife easy48; Regiolux Classification: netlife easy; Control signal: Switch; Number of control gear (max): 400W LED; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 4m to 14m; Monitoring area: max. D=20m; Remote control: 84501101203; Optional remote control: 84501101200 +App; App name: Steinel smart remote; Application: Industry, Logistics centres, Corridors, Garages; Function: Motion detection, Switch. When used with 7-pole rail, the contacts in the device mount must be reconnected. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. netlife easy system; straightforward in-house project engineering; easy installation; preset functions; simple commissioning via remote control, app, DIP switch, rotary knob, etc.

CHARACTERISTICS

|                    |                   |
|--------------------|-------------------|
| Order number       | 19152700480       |
| EAN number         | 4020863449507     |
| Commodity code     | 90328900          |
| Certification mark | IP 54, CE         |
| Special properties | Advanced Services |

ELECTRICAL ENGINEERING

|               |           |
|---------------|-----------|
| Controller    | easy48    |
| Mains voltage | 230V/50Hz |

MECHANICS



|                        |  |
|------------------------|--|
| Housing colour         | traffic white RAL 9016   |
| Dimensions (LxWxH/DxH) | 765mm x 95mm x 88mm  |
| Weight (net)           | 0.9kg  |
| Type of installation   | Mounting rail system installation,<br>Ceiling-mounted light structure, Pendant light structure |

Dimensions

|   |        |        |
|---|--------|--------|
| L | 765 mm | Length |
| B | 95 mm  | Width  |
| H | 88 mm  | Height |

DEEP-LINK


<https://www.regiolux.de/en/article/19152700480>



LC SYSTEM

CHARACTERISTICS

|                               |  |
|-------------------------------|--|
| Regiolux Classification       | netlife easy                                       |
| Control signal                | Switch   |
| Number of control gear (max)  | 400W LED   |
| Communication                 | Wired  |
| Sensor technology             | PIR - passive infrared                             |
| Installation height (min/max) | 4m to 14m  |
| Remote control                | 84501101203  |
| Optional remote control       | 84501101200 +App                                   |
| App name                      | Steinel smart remote                               |
| Application                   | Industry, Logistics centres, Corridors,<br>Garages |
| Function                      | Motion detection, Switch                           |

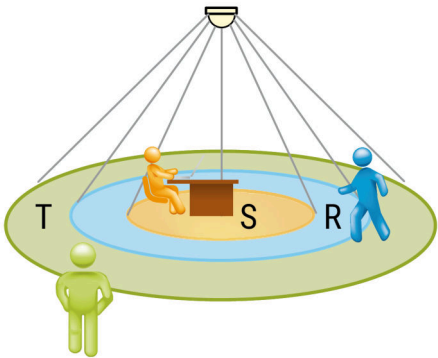

MONITORING AREA

|                      |       |       |     |
|----------------------|-------|-------|-----|
| Mounting Height      | 5m    | 10m   | 14m |
| Ø max. sitting[S]    | -     | -     | -   |
| Ø max. radial[R]     | 11m   | 14,5m | -   |
| Ø max. tangential[T] | 34,5m | 28m   | 20m |

