

IP 54 variable Device mount functional module netlife light management

Device mounts made of galvanised, profiled sheet steel with zinc coating combined with polyester resin paint guarantee good corrosion protection; tool-free attachment with integrated rotary catches for rapid fitting in the support rail. Integrated end faces made of plastic with sealing lips and an all-round closed seal to the support rail for a protection type up to IP54. For integrating sensor technology and the control unit into the light run; can be positioned variably in the support rail. Housing colour traffic white RAL 9016; . Electrical connection by means of a 0.7m connection cable for variable device mount positioning in the light run with freely positionable phases. Light Control: netlife pro47; Regiolux Classification: netlife pro; Control signal: DALI LINK; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 5m to 16m; Monitoring area: max. 30m x 19m; System compatibility: B.E.G. KNX Gateway, netlife flex office; DALI system power: 7mA; System extension: pro47; Application: Industry, Logistics centres, Corridors; Function: Motion detection, Corridor function, Guided Light, Daylight control, Manual dimming. They are exchangeable, permit modernisation and reliably prolong the service life of the overall system. netlife pro; programmable systems; project engineering support by Regiolux; more complex installation; free functions and multiple settings; visualisation; programming and commissioning; interconnectivity and radio solutions; IoT and cloud-capable

## CHARACTERISTICS

Order number	19152700470
EAN number	4020863422555
Commodity code	94051190
Certification mark	IP 54, HACCP DIN10500/Food/IFS-application-related suitability/BRC, Indoor, CE
Special properties	Advanced Services

## ELECTRICAL ENGINEERING

Controller	pro47
------------	-------

## MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	765mm x 102mm x 99mm
Weight (net)	0.9kg
Type of installation	Mounting rail system installation, Ceiling-mounted light structure, Pendant light structure

## Dimensions

L	765 mm	Length
B	102 mm	Width
H	99 mm	Height

## DEEP-LINK


<https://www.regiolux.de/en/article/19152700470>



## LC SYSTEM

### CHARACTERISTICS

Regiolux Classification	netlife pro	
Control signal	DALI LINK	
Communication	Wired	
Sensor technology	PIR - passive infrared	
Installation height (min/max)	5m to 16m	
System compatibility	B.E.G. KNX Gateway, netlife flex office	
DALI system power	7mA	
System extension	pro47	
Application	Industry, Logistics centres, Corridors	
Function	Motion detection, Corridor function, Guided Light, Daylight control, Manual dimming	

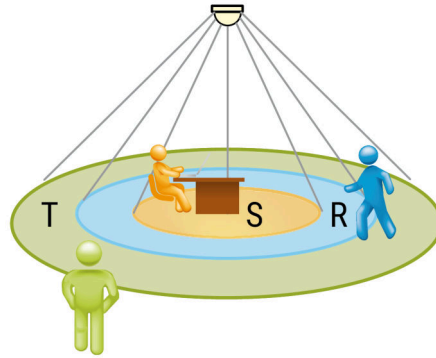

### MONITORING AREA

Mounting Height	14m	16m
Ø max. sitting[S]	-	-
Ø max. radial[R]	30x19m	30x19m
Ø max. tangential[T]	30x19m	30x19m

