

Recessed luminaire - Single micro louvre with 80° lens - direct distribution

Sheet steel housing suitable for recessed ceilings and for ceilings with visible T-rails; white coated, similar to RAL 9016. Housing colour traffic white RAL 9016; Light distribution direct distribution by means of Single micro louvre with 80° lens, single micro louvre, black. Suitable for VDU workstations, 65° < 100 cd/m² omnidirectional glare reduction in accordance with current DIN-EN 12464-1 standard, UGR (4H/8H) 13. Electrical connection via 5-pole connection terminal with plug-in contacts.. Luminaire with Tunable White continuously adjustable colour temperatures, for implementing human-centric daylight simulations (HCL). Additional control components may be offered depending on requirements. Recommended accessories for installation in cut-out ceilings, AGER-ES and surface-mounting frame PE-AR 600/625 must be ordered separately. Luminaire with tunable white continuously adjustable colour temperatures, for implementing Human Centric Lighting HCL daylight simulations. White single micro louvre possible on request.

CHARACTERISTICS

Order number	60626027670
EAN number	4020863419722
Commodity code	94051190
Certification mark	IP 20, Protection class I, γ 65°<100 cd/m ² , F, F-"roof" mark, Indoor, CE
Impact resistance (IK rating)	IK02
Ambient temperatur	ta 25°C
Special properties	Ready for IoT
Warranty period	5 years
State funding programs	BEG - Federal funding for efficient buildings (valid only for Germany)

DEEP-LINK



<https://www.regiolum.de/en/article/60626027670>

ELECTRICAL ENGINEERING


Controller	Electronic driver DALI device type 8 (1 pcs.)
System output	32W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	13 pieces/B10, 22 pieces/B16, 21 pieces/C10, 36 pieces/C16
Energy efficiency class/light source	D

LIGHTING TECHNOLOGY

Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 2700K-6500K continuously adjustable
Colour tolerance (MacAdam)	3SDCM
Photobiological safety (Luminaire)	RG1
Nominal luminous flux	3996lm
LED service life	50000h L80/B10 (Tq 25°C)
Luminaire luminous efficiency	124lm/W
UGR lat./long.	13.0 / 13.0

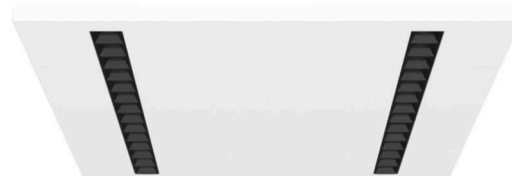

Reference	LED 4000lm 827-865
ηLB	100 %
Φ ↓/↑	100 % / 0 %
UGR lat./long.	13.0 / 13.0

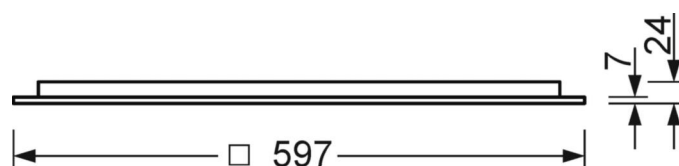

MECHANICS

Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	597mm x 597mm x 24mm
Depth	17mm
Ceiling system	Ceilings with visible T-rails [s-TS] (600x600 mm), cut-out ceilings [AD]
Ceiling cut-out (LxW/D)	575mm x 575mm
Installation depth	100mm [AD]; 100mm [s-TS] min
Weight (net)	4.2kg
Cable entry KE (X/Y)	0mm/0mm
Type of installation	Ceiling installation individual mounting, Recessed mounting, Ceiling-mounted single installation

Dimensions

L	597 mm	Length
B	597 mm	Width
H	24 mm	Height
T	17 mm	Depth
DA(L)	575 mm	Cutting dimension length
DA(B)	575 mm	Cutting dimension width
Et(min)	100 mm	Ceiling distance minimum - minimum dimension (visible T-rail)
Et(AD)	100 mm	Ceiling distance minimum (cut-out ceiling)
X	0 mm	Distance cable infeed to the center of the luminaire on the X-axis
Y	0 mm	Distance cable infeed to the center of the luminaire on the Y-axis