

Recessed luminaire - Micro-prismatic diffuser - direct distribution

Suitable for ceilings with visible T-bars; flat aluminium frame, powered white; steel plate housing; Housing colour traffic white RAL 9016; LED backlight light technology; direct light distribution using non-yellowing microprismatic PMMA diffuser and single lenses, ideal for VDU workstations, UGR19, $65^\circ < 3000$ cd/m omnidirectional glare reduction in accordance with current DIN-EN 12464-1 standard; Including DALI driver, flicker < 5%;. Electric connection via connection box with $2 \times 0.5\text{mm}^2$ connection cable 150mm long including coupling connector, 5-pole plug-type terminal for cable cross-sections up to $5 \times 2.5\text{mm}^2$ and strain relief, suitable for feed-through wiring. Protection rating: IP20/IP40 room-side. Accessories: for ceiling surface-mounting frame 60170005100, ceiling suspension frame 60170004100;

CHARACTERISTICS

Order number	60174036650
EAN number	4020863448579
Commodity code	94051190
Certification mark	IP 40/20, Protection class II, VDU $65^\circ < 3000$, F, Indoor, CE
Impact resistance (IK rating)	IK02 (-10°C bis 35°C)
Ambient temperatur	ta -10°C to 35°C
Special properties	Ready for IoT
Warranty period	5 years

ELECTRICAL ENGINEERING

Controller	Electronic driver DALI2 (1 pcs.)
System output	40W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	20 pieces/B10, 32 pieces/B16, 33 pieces/C10, 53 pieces/C16
Energy efficiency class/light source	C

LIGHTING TECHNOLOGY



Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
Colour tolerance (MacAdam)	3SDCM
Nominal luminous flux	4777lm
LED service life	50000h L80/B10 (Tq 35°C/do not cover with insulation wool)
Luminaire luminous efficiency	119lm/W
UGR lat./long.	19.6 / 19.5

MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	1195mm x 295mm x 33mm
Depth	33mm
Ceiling system	ceilings with visible T-rails [s-TS] (300x1200 mm)
Installation depth	145mm [s-TS]; 115mm [s-TS] min
Weight (net)	2.23kg
Type of installation	Recessed mounting, Ceiling-mounted single installation, Pendant individual mounting

DEEP-LINK

<https://www.regiolum.de/en/article/60174036650>

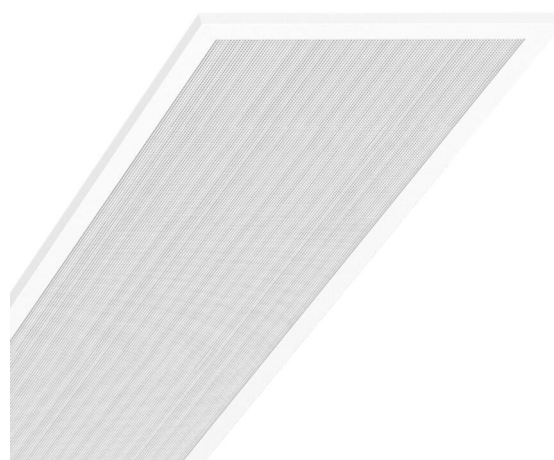

Reference	LED 4800lm 840
η_{LB}	100 %
$\Phi_{\downarrow/\uparrow}$	100 % / 0 %
UGR lat./long.	19.6 / 19.5
VDU	$65^\circ < 3000\text{cd/m}^2$

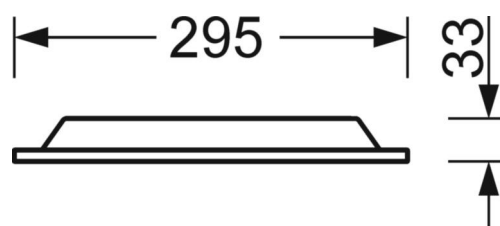

Dimensions

L	1195 mm	Length
B	295 mm	Width
H	33 mm	Height
T	33 mm	Depth
Et(min)	115 mm	Ceiling distance minimum - minimum dimension (visible T-rail)
Et(TS)	145 mm	Ceiling distance minimum - recommended (visible T-rail)
MLTS1	1200 mm	Module dimension length (visible T-rail)
MLTS_1/2	1200	Module dimension length (visible T-rail) 1/2
MBTS1	300 mm	Module dimension width (visible T-rail)
MBTS_1/2	300	Module dimension width (visible T-rail) 1/2
KL	144 mm	Length luminaire head or box for ballasts
KB	42 mm	Width luminaire head or box for ballasts
KH	29 mm	Height luminaire head or box for ballasts
