

Recessed luminaire - Micro-prismatic diffuser - direct distribution

Sheet steel housing suitable for ceilings with visible T-rails, concealed symmetrical rail constructions and recessed ceilings; Housing colour traffic white RAL 9016; Light distribution direct distribution by means of Micro-prismatic diffuser of PMMA, a soft light is emitted on the outside with special ice-finish diffusers; light colour from warm white (927) to daylight white (965) with excellent colour consistency and colour rendering Ra>90. Suitable for VDU workstations, 65° < 3000 cd/m² omnidirectional glare reduction in accordance with current DIN-EN 12464-1 standard, UGR (4H/8H) 18.9. Integrated DALI LED drivers device type 8 (DT8). Electrical connection via 5-pole connection terminal with plug-in contacts. TNE-BM mounting mechanism 4 pcs. 600/625 for concealed symmetrical rail constructions or recessed ceilings, please order separately. DALI control units must be ordered separately.

CHARACTERISTICS

Order number	50801416970
EAN number	4020863367306
Commodity code	94051190
Certification mark	IP 20, Protection class I, VDU 65°<3000, F, F-"roof" mark, Indoor, CE
Impact resistance (IK rating)	IK02
Ambient temperatur	ta 25°C
Special properties	Ready for IoT
Warranty period	5 years

ELECTRICAL ENGINEERING

Controller	Electronic driver DALI device type 8 (1 pcs.)
System output	46W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	13 pieces/B10, 22 pieces/B16, 21 pieces/C10, 36 pieces/C16
Energy efficiency class/light source	E

LIGHTING TECHNOLOGY


Placement	LED, Colour rendering/Light colour CRI ≥ 90 / 2700K-6500K continuously adjustable
Colour tolerance (MacAdam)	3SDCM
Photobiological safety (Luminaire)	RG0
Nominal luminous flux	3950lm
LED service life	50000h L80/B10 (Tq 25°C)
Luminaire luminous efficiency	85lm/W
UGR lat./long.	18.5 / 18.9

MECHANICS


Housing colour	traffic white RAL 9016
Dimensions (LxWxH/DxH)	597mm x 597mm x 102mm
Depth	100mm
Ceiling system	ceilings with visible T-rails [s-TS] (312.5x1250 mm), Concealed symmetrical rail construction [VS] (312.5x1250 mm), cut-out ceilings [AD]
Ceiling cut-out (LxW/D)	585mm x 591mm
Installation depth	120mm [AD]; 250mm [s-TS]; 120mm [VS]
Weight (net)	6.05kg
Type of installation	Recessed mounting, Ceiling installation individual mounting

DEEP-LINK

<https://www.regiolux.de/en/article/50801416970>



Reference	LED 4000lm 927-965
ηLB	100 %
Φ ↓/↑	100 % / 0 %
UGR lat./long.	18.5 / 18.9
VDU	65° < 3000cd/m ²

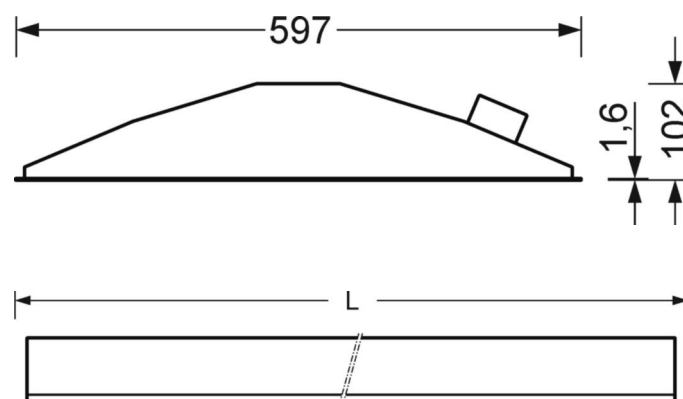

Dimensions

L	597 mm	Length
B	597 mm	Width
H	102 mm	Height
T	100 mm	Depth
DA(L)	585 mm	Cutting dimension length
DA(B)	591 mm	Cutting dimension width
Et(AD)	120 mm	Ceiling distance minimum (cut-out ceiling)
Et(TS)	250 mm	Ceiling distance minimum - recommended (visible T-rail)
Et(VS)	120 mm	Ceiling distance minimum (concealed symmetrical)
MLTS1	600 mm	Module dimension length (visible T-rail)
MLTS_1/2	600	Module dimension length (visible T-rail) 1/2
MLVS	600 mm	Module dimension length (concealed symmetrical)
MBTS1	600 mm	Module dimension width (visible T-rail)
MBTS_1/2	600	Module dimension width (visible T-rail) 1/2
MBVS	600 mm	Module dimension width (concealed symmetrical)
