

Accessories - Control system accessories electrical engineering - netlife module for agila

Housing colour silver grey/white aluminium RAL 9006; . Light Control: netlife easyM5S5; Regiolux Classification: netlife easy; Control signal: DALI broadcast; Number of control gear (max): 32; Communication: Wired; Sensor technology: PIR - passive infrared; Installation height (min/max): 2m to 5m; Monitoring area: max. D=7m; Remote control: 84501041200; Optional remote control: 84501042100; Application: Office, Secondary rooms, Meeting rooms, Classrooms, Corridors; Function: Motion detection, presence detection, Daylight control, Manual dimming, Corridor function.

CHARACTERISTICS

Order number	60609000105
EAN number	4020863448371
Commodity code	90328900
Certification mark	IP 20, Indoor, CE

ELECTRICAL ENGINEERING

Mains voltage	230V/50Hz
---------------	-----------

MECHANICS



Housing colour	silver grey/white aluminium RAL 9006
Dimensions (LxWxH/DxH)	160mm x 51mm x 69mm
Weight (net)	0.08kg
Type of installation	Ceiling-mounted single installation, Pendant individual mounting, Pendant light strip mounting

Dimensions

L	160 mm	Length
B	51 mm	Width
H	69 mm	Height

DEEP-LINK


<https://www.regiolux.de/en/article/60609000105>



LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife easy
Control signal	DALI broadcast
Number of control gear (max)	32
Communication	Wired
Sensor technology	PIR - passive infrared
Installation height (min/max)	2m to 5m
Remote control	84501041200
Optional remote control	84501042100
Application	Office, Secondary rooms, Meeting rooms, Classrooms, Corridors
Function	Motion detection, presence detection, Daylight control, Manual dimming, Corridor function

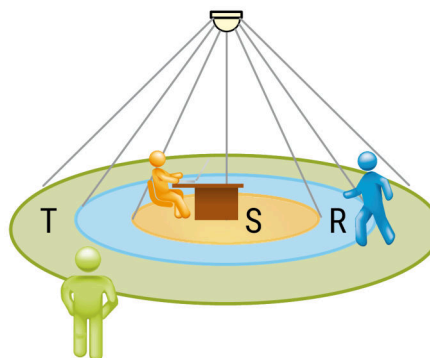

MONITORING AREA

Mounting Height	2,5m	3,5m	5m
Ø max. sitting[S]	3,3m	5m	-
Ø max. radial[R]	5,3m	7m	7m
Ø max. tangential[T]	-	-	-

