

Accessories - Pattern wire suspension with ceiling cylinder

Rectangular canopy L=317mm vw, metal ceiling cylinder, 2 wires D=1.2 L=1900; Housing colour traffic white RAL 9016; . Anschlussleitung 5x0,75. Light Control: netlife flex10L; Regiolux Classification: netlife flex; Control signal: DALI, Radio; Number of control gear (max): 5; Communication: Bluetooth; App name: Casambi, 4remote BT; System compatibility: flex10; flex10X; flex10L; flex37; flex39; Note: compatible with Casambi; Application: Office, Meeting rooms, Secondary rooms, Retail, Corridors, Garages, Classrooms, Sports facilities; Function: Motion detection*, Corridor function*, Guided Light*, HCL (only with DT8 luminaires), presence detection*, Daylight control, Tunable white (only with DT8 luminaires), Manual dimming, *only by auxiliary devices. Suspension set with integrated receiver Operation and configuration via the Casambi app.

CHARACTERISTICS

Order number	91101025121
EAN number	4020863377725
Commodity code	94059900
Certification mark	Indoor, CE

ELECTRICAL ENGINEERING

Wiring	5x0.75mm ²
--------	-----------------------

MECHANICS



Housing colour	traffic white RAL 9016
Dimensions (LxWxDxH)	317mm x 44.5mm x 39mm
Weight (net)	0.58kg
Type of installation	Pendant individual mounting, Pendant light strip mounting

Dimensions

L	317 mm	Length
B	44.5 mm	Width
H	39 mm	Height

DEEP-LINK

<https://www.regiolux.de/en/article/91101025121>

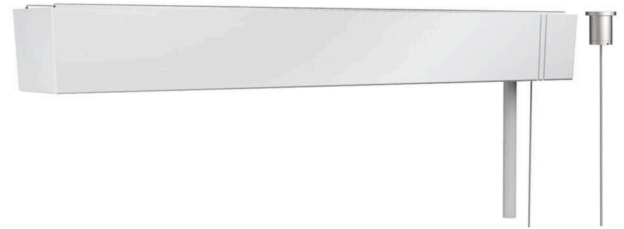

LC SYSTEM

CHARACTERISTICS

Regiolux Classification	netlife flex
Control signal	DALI, Radio
Number of control gear (max)	5
Communication	Bluetooth
App name	Casambi, 4remote BT
System compatibility	flex10; flex10X; flex10L; flex37; flex39
Note	compatible with Casambi
Application	Office, Meeting rooms, Secondary rooms, Retail, Corridors, Garages, Classrooms, Sports facilities
Function	Motion detection*, Corridor function*, Guided Light*, HCL (only with DT8 luminaires), presence detection*, Daylight control, Tunable white (only with DT8 luminaires), Manual dimming, *only by auxiliary devices

