

Recessed luminaire - Micro-prismatic diffuser - direct distribution

Sheet steel housing suitable for ceilings with visible T rails, concealed symmetrical rail constructions and cut-out ceilings; protection rating refers to visible luminaire surface; Housing colour traffic white RAL 9016; Light distribution direct distribution by means of Micro-prismatic diffuser of acrylic glass, with naturally anodised aluminium frame, neutral white light colour (840) with very good colour consistency and high colour rendering Ra>80. Suitable for VDU workstations, 65° < 3000 cd/m<sup>2</sup> omnidirectional glare reduction in accordance with current DIN-EN 12464-1 standard, UGR (4H/8H) 18.9. Electrical connection via 3-pole connection terminal with plug-in contacts.; With changeover converter for emergency lighting operation on request. An extractor is included for prismatic and frosted panes to remove the sealing frame. UBM universal mounting brackets for concealed symmetrical rail constructions or recessed ceilings and SCT locking clips for ceilings with visible T rails: please order separately.

**CHARACTERISTICS**

Order number	72560014150
EAN number	4020863289318
Commodity code	94051190
Certification mark	IP 54, Protection class I, VDU 65°<3000, F, HACCP DIN10500/Food/IFS/BRC, Indoor, CE
Impact resistance (IK rating)	IK02
Ambient temperatur	ta 25°C
Warranty period	5 years
State funding programs	BEG - Federal funding for efficient buildings (valid only for Germany)

**DEEP-LINK**

<https://www.regiolum.de/en/article/72560014150>

**ELECTRICAL ENGINEERING**


Controller	Electronic driver (1 pcs.)
System output	32W
Mains voltage	230V/50Hz
Circuit breakers (inrush current)	15 pieces/B10, 25 pieces/B16, 26 pieces/C10, 42 pieces/C16
Energy efficiency class/light source	C

**LIGHTING TECHNOLOGY**


Placement	LED, Colour rendering/Light colour CRI ≥ 80 / 4000K
Colour tolerance (MacAdam)	3SDCM
Nominal luminous flux	4355lm
LED service life	50000h L80/B10 (Tq 25°C)
Luminaire luminous efficiency	134lm/W
UGR lat./long.	18.5 / 18.9

**MECHANICS**

Housing colour	traffic white RAL 9016
Dimensions (LxWxD)	597mm x 597mm x 89mm
Depth	82mm
Ceiling system	Ceilings with visible T-rails [s-TS] (600x600 mm), Concealed symmetrical rail construction [VS] (600x600 mm), cut-out ceilings [AD]
Ceiling cut-out (LxW/D)	585mm x 585mm
Installation depth	150mm [AD]; 250mm [s-TS]; 150mm [s-TS] min; 150mm [VS]
Weight (net)	5.3kg
Type of installation	Recessed mounting, Ceiling installation individual mounting



Reference	LED 4300lm 840
ηLB	100 %
Φ ↓/↑	100 % / 0 %
UGR lat./long.	18.5 / 18.9
VDU	65° < 3000cd/m <sup>2</sup>

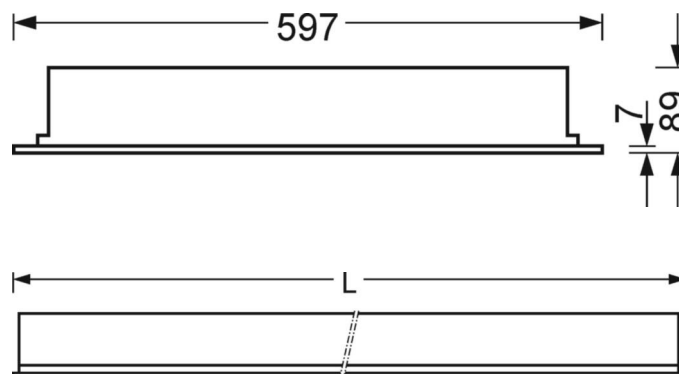

**Dimensions**

<b>L</b>	597 mm	Length
<b>B</b>	597 mm	Width
<b>H</b>	89 mm	Height
<b>T</b>	82 mm	Depth
<b>DA(L)</b>	585 mm	Cutting dimension length
<b>DA(B)</b>	585 mm	Cutting dimension width
<b>DS min</b>	15 mm	Ceiling thickness minimum
<b>DS max</b>	40 mm	Ceiling thickness maximum
<b>Et(min)</b>	150 mm	Ceiling distance minimum - minimum dimension (visible T-rail)
<b>Et(AD)</b>	150 mm	Ceiling distance minimum (cut-out ceiling)
<b>Et(TS)</b>	250 mm	Ceiling distance minimum - recommended (visible T-rail)
<b>Et(VS)</b>	150 mm	Ceiling distance minimum (concealed symmetrical)
<b>MLTS1</b>	600 mm	Module dimension length (visible T-rail)
<b>MLTS_1/2</b>	600	Module dimension length (visible T-rail) 1/2
<b>MLVS</b>	600 mm	Module dimension length (concealed symmetrical)
<b>MBTS1</b>	600 mm	Module dimension width (visible T-rail)
<b>MBTS_1/2</b>	600	Module dimension width (visible T-rail) 1/2
<b>MBVS</b>	600 mm	Module dimension width (concealed symmetrical)